

# Double Tank

SHOWER SOFTENING UNITS



## Double tank shower softening units adding salt and initiating regen mode.

The regeneration of the double tank softeners can be clock type, meter type, or battery-driven. These systems can be set up to have both tanks as softeners, as a combination with one tank serving as a filter and the other serving as the softener, or as an automatically regenerating multi-regeneration softening unit.



M3B3, M4B5




M3A3, M4A5

## Double tank shower softening units feature:

- Filled with softening resin applicable to the treatment of high hardness water
- Dynamic regeneration model allows for more water treatment capacity and savings on salt and water
- Can be installed before and after the water heater. Before water heater could prevent heater damage from scale
- Single button for regeneration and then automatically controlled regeneration time
- Data saved after power off

# Double Tank

SHOWER SOFTENING UNITS

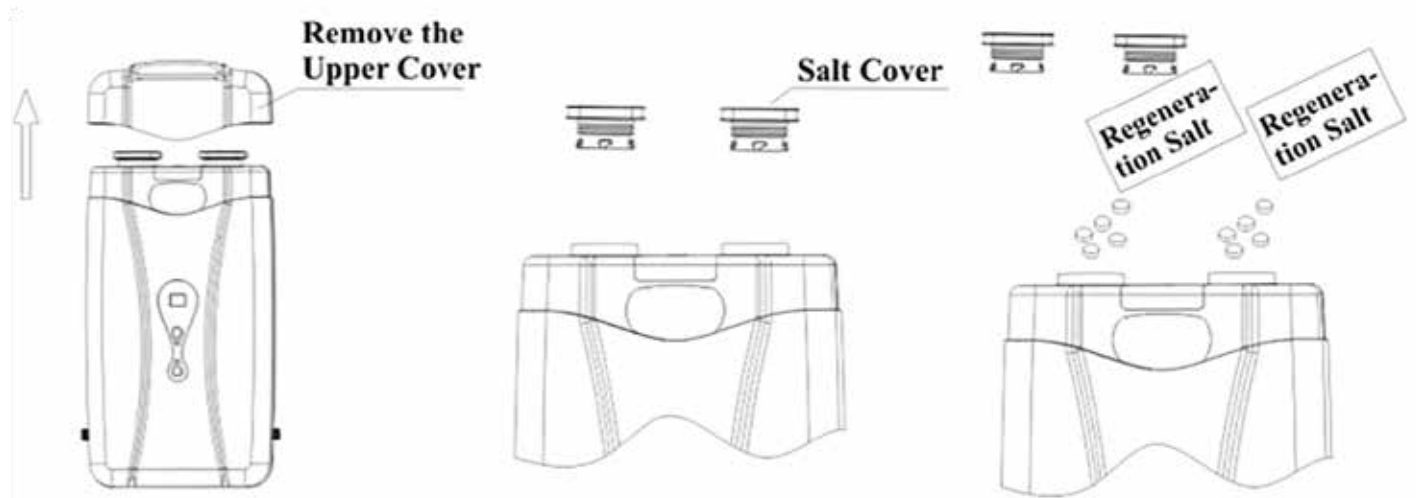

Model	RL-R50/Double Tank
Tank Size	5" x 12" (X2)
Resin Volume	.194 f <sup>3</sup> (total)
Capacity	396 gal. (1500L)
Rated Flow Rate	2.64 gpm.
Salt Consumption	28 oz.
Inlet/ Outlet	G 1/2
Dimensions	24"H x12.4"W x 6.7"D
* All data based on testing with 11.7 gpg hardness	