






## Filter and softener shower units feature:

- Use of KDF and activated carbon filter materials to eliminate residual chlorine and prevents bacteria growth
- Dynamic regeneration mode allows for more water treatment capacity and savings on salt and water
- Can be installed before or after water heater. Before water heater could prevent heater damage from scale
- Single button for regeneration and then automatically controlled regeneration time
- Data saved after power off



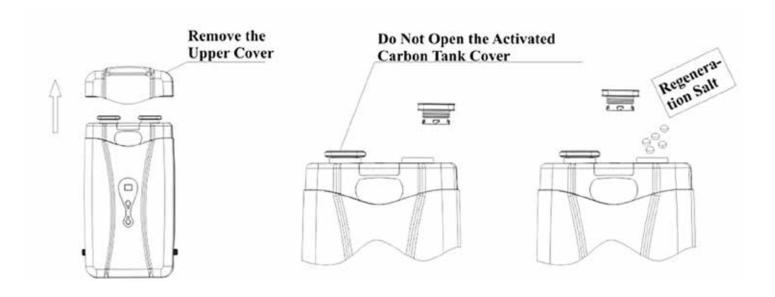

Model	RL-R50/M5A3 and M5B3
Tank Size	5" x 12" / 5" x 12"
Resin Volume	.09 f³
Capacity	198 gal. (750L)
Salt Consumption	14 oz.
Inlet/ Outlet	G 1/2
Dimensions	24"H x12.4"W x 6.7"D
* All data based on testing with 11.7 gpg hardness	