

# Single Tank

## SHOWER SOFTENING UNITS



### Single tank shower softening units adding salt and initiating regen mode.

The regeneration of the single tank softeners can be clock type, meter type, or battery-driven. Clock type requires users to set a regeneration interval according to their own water consumption rate. Meter type only needs a setting of the local water hardness. In both cases, once programmed time has transpired or water usage has been consumed, the softener will alert owner of regeneration need. The regeneration is then initiated by adding salt and pushing the regeneration button. The system does not have to be monitored while regenerating.

### Single tank shower softening units feature:

- Filled with softening resin
- Time clock, meter, or battery driven type optional
- Dynamic regeneration mode allows for more water treatment capacity and savings on salt and water
- Single button for regeneration and then automatically controlled regeneration time
- Data saved after power off




M1B1, M1B3, M2B5



M1A1, M1A3, M2A5

# Single Tank

SHOWER SOFTENING UNITS

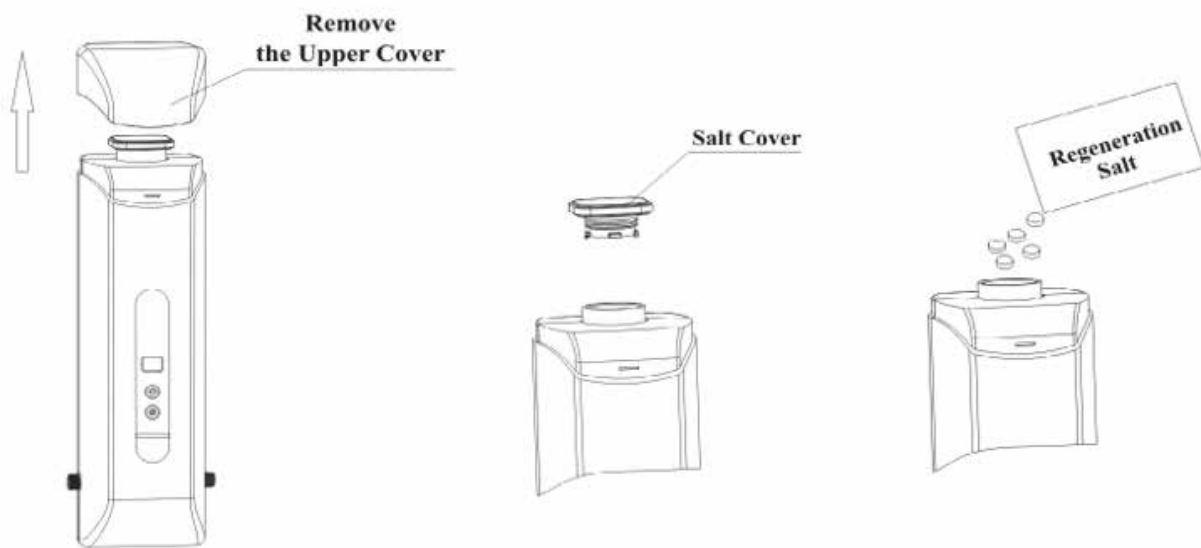

Model	RL-R50/Single Tank
Tank Size	5" x 12"
Resin Volume	.09 f <sup>3</sup>
Capacity	198 gal. (750L)
Salt Consumption	14 oz.
Inlet/ Outlet	G 1/2
Dimensions	24"H x 7"W x 7"L
* All data based on testing with 11.7 gpg hardness	