

RevV2.5

HIGH EFFICIENCY SOFTENING SYSTEMS

The most innovative and advanced water softening system in the industry.



Most advanced ceramic valve system for residential and light commercial use.

Our RevV2.5 High Efficiency Softening Systems are designed with high flow rates to handle most residential or light commercial applications. These systems are certified by IAPMO to NSF/ANSI Standard 44 for structural integrity, material safety, and performance verification, as well as NSF/ANSI Standard 372 to meet the lead content requirements for "lead-free" plumbing as stated in the U.S. Safe Drinking Water Act. They feature innovative, patented ceramic discs that are abrasion and corrosion resistant, extending the life of the valve and significantly reducing maintenance costs. The systems also use high-quality, crosslink resin for exceptional longevity.

The RevV2.5 valves within these systems have 7 advanced programming options with fully adjustable cycles to minimize water usage during regeneration. They utilize up-flow regeneration which efficiently washes the media, exchanging more grains per pound of salt. RevV2.5 valves have signal output for external devices, program functions that remain in long-term memory, and 72-hour memory backup should a power outage occur, giving you the confidence that you are receiving a cost-effective, high-quality water treatment solution.

RevV2.5 Certified Softening Systems Feature:

- Patented ceramic discs are corrosion and abrasion resistant for longer life and reduced maintenance.
- Multiple, programmable efficiency settings; grains exchanged per lb. of salt
- Bright, easy to read LCD display
- Long-term memory for program functions
- 72-hour memory backup
- No external PLC required to operate multiple control heads or external devices.
- Purolite® crosslink resin
- 4 language options: English, Spanish, Chinese, and French






This valve is Tested and Certified by NSF International against NSF/ANSI Standard 44 for materials and structural integrity requirements.



RevV2.5

HIGH EFFICIENCY SOFTENING SYSTEMS

All ceramic components guaranteed for life.

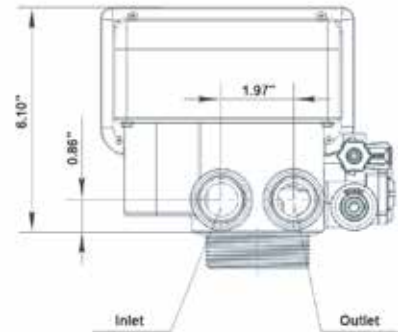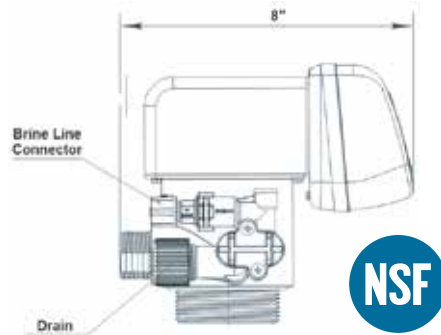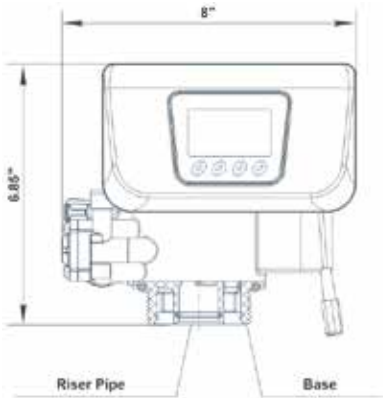

Dimensions

Width	Height	Depth
8"	6.85"	8"

Electrical Specifications

Transformer Input	Transformer Output
100-240VAC / 50-60 Hz	12VDC / 2A

Operational Specifications

Operational Pressure	Operational Water Temperature	Inlet Water Turbidity
20 psi - 88 psi	35°F - 125°F	<5FTU

Control Valve Parameters

Inlet	Outlet	Drain	Brine	Base	Riser Tube	Hard Water Bypass
1"	1"	3/4"	3/8"	2.5" - 8NPSM	1.05"	Yes

Additional Specifications

Valve Height From Top of Tank	Meter Accuracy	Weight
6.10" / 155mm	±5%	1.69 kg / 3.73 lbs.