

REV 4

CERTIFIED SOFTENING SYSTEMS

The most innovative and advanced water softening system in the industry.



Most advanced ceramic valve system for residential and light commercial use.

Our Rev 4 Certified Softening Systems are designed with high flow rates to handle most residential or light commercial applications. These systems are certified by IAPMO to NSF/ANSI Standard 44 for structural integrity, material safety, and performance verification, as well as NSF/ANSI Standard 372 to meet the lead content requirements for "lead-free" plumbing as stated in the U.S. Safe Drinking Water Act. They feature innovative, patented ceramic disks that are abrasion and corrosion resistant, extending the life of the valve and significantly reducing maintenance costs. The systems also use high-quality, crosslink resin for exceptional longevity.

The Rev 4 valves within these systems have 7 advanced programming options with fully adjustable cycles to minimize water usage during regeneration. They utilize up-flow regeneration which efficiently washes the media, exchanging more grains per pound of salt. Rev 4 valves have signal output for external devices, program functions that remain in long-term memory, and 72-hour memory backup should a power outage occur, giving you the confidence that you are receiving a cost-effective, high-quality water treatment solution.

Rev 4 Certified Softening Systems Feature:

- Patented ceramic disks are corrosion and abrasion resistant for longer life and reduced maintenance.
- Multiple, programmable efficiency settings; grains exchanged per lb. of salt
- Bright, easy to read LCD display
- Long-term memory for program functions
- 72-hour memory backup
- No external PLC required to operate multiple control heads or external devices.
- Purolite® crosslink resin
- 4 language options: English, Spanish, Chinese, and French




This valve is Tested and Certified by NSF International against NSF/ANSI Standard 44 for materials and structural integrity requirements




REV 4

CERTIFIED SOFTENING SYSTEMS

All ceramic components guaranteed for life.

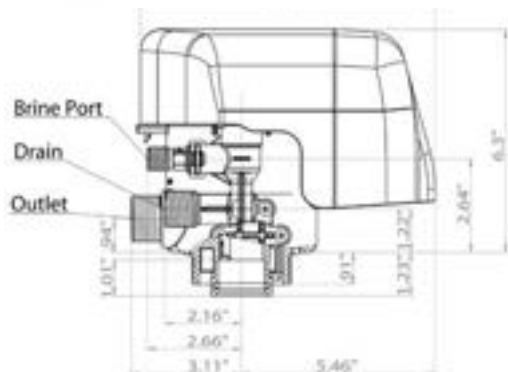

NSF

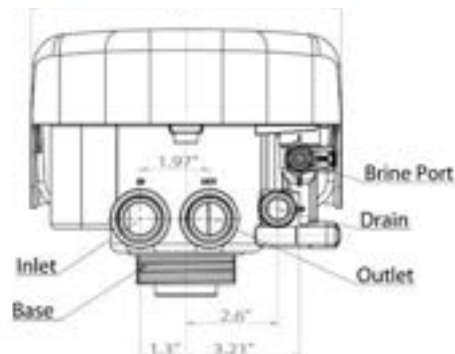

System Specifications

System Size	Resin (cu. ft.)	Overall Height (in.)	Diameter (in.)	Flow Rate**	Water Used/ Regen	Grains exchanged per lb. ***
9x48	1.0	54.3"	9"	16 gpm	50.82 - 57.76 gal.	3,624.0
10x44	1.25	50.3"	10"	17 gpm	57.98 - 67.20 gal.	3,624.0
10x54	1.5	60.3	10"	18 gpm	58.15- 68.20 gal.	3,624.0
12x52	2.0	58.3"	12"	20 gpm	86.56 - 99.60 gal.	3,624

*Additional sizes available

**Flow rate at 15 psi drop

***Exchange rates based on standard salt settings; ANSI/NSF 44 certification

Electrical / Operational Specifications

Control Valve		Working Conditions	
Transformer Input	100 - 240VAC / 50-60Hz	Water Pressure	20 - 120 psi
Transformer Output	12VDC / 2A	Water Temperature	35°F - 125°F
		pH Level	7.5 ± 0.5

Control Valve Parameters

Inlet	Outlet	Drain	Brine	Base	Riser Tube	Hard Water Bypass
1"	1"	1/2" Barbed 3/4 NPT	3/8"	2.5" - 8NPSM	32mm	Yes

Additional Specifications

Valve Material	Tank Material	Valve Height From Top of Tank	Meter Accuracy	Clock
ABS Plastic	Fiberglass	7" / 180mm	±5%	12- or 24-hour